

Treatment of waster water

Biological

Septic tank / Cesspool /
All waters tank / Grease
traps

Water-soluble
bags

**Enzymes =
Performance**

Application

Biological treatment (enzymes and non pathogenic bacteria).

- Recommended for the degradation of organic residues ;
- Prevents blocking and bad smells ;
- Reduces the frequency of clearing out of septic tanks/grease traps.

Use

Septic tanks, Grease traps, cesspool, All waters tank : collectivity, private apartment blocks, schools, public services, hospitals, industry, ...

Dosage Instructions

Septic tank	
Setting up a new septic tank	600 g/ m ³
Maintenance	200 g/ m ³ / 15 days
Grease traps	
250 meals / day	300 g/ week
500 meals / day	500 g/ week
1000 meals / day	1000 g/ week

Advantages

For more than 30 years, REALCO has been developing cleaning solutions respecting the environment. The enzymatic technology developed by REALCO is the best performing solution on the market to protect our environment and the user (patented technology : n°EP1025052, n°PCT/EP2006/060244).

- Positive effect on the drains upstream of the installations ;
- Important reduction of the maintenance of the installations ;
- Reduction of grease traps clearing out (by a factor 3 to 4) and septic tanks ;
- Makes it possible to work under extreme conditions (pH, temperature,...) ;
- Very easy to apply : Water-soluble bags of 50 gr ;
- Contains harmless micro-organisms of class 1 (according to the European Federation of Biotechnology) that have never been identified as causative agents of disease in man and that offer no threat to the environment.

**30/10/2009
S.A. REALCO N.V.**

Parc scientifique • Wetenschappelijk park • Avenue Albert Einsteinlaan, 15 • B-1348 Louvain-la-Neuve (Belgium)

Tel. +32 (0)10/45.30.00 • Fax +32 (0)10/45.63.63 • info@realco.be • www.realco.be

TVA/BTW-BE-0444.458.750•RPM/RPR Nivelles•ING-350-01322306-20

C
P
L

3
0

C
P
L
3
0

Active Matters

Among others :

Alkaline agent
Enzymes
Bacteria

Physical-Chemical Properties

Aspect	Powder
Colour	Brown
Volume massa	1,115±0,150 kg/l
pH 1 %	7,8±0,5


Precautions

Product developed for professional use only. It is recommended to use the product for the applications defined here above.

For more information on our product, we invite you to consult the safety data sheet that can be provided to you on a simple request.

**Article code
Packaging
Palletization**

POU0806
1 x 4 kg (80 x 50 gr)
60 buckets / pallet

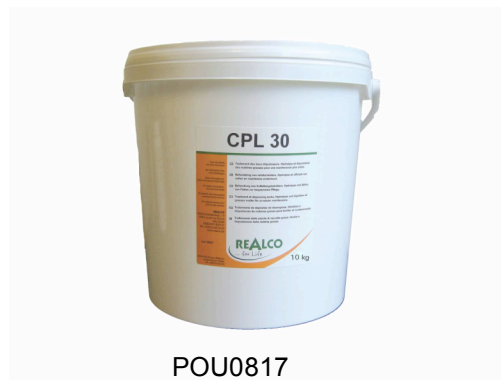

POU0817
1 x 10 kg
48 buckets / pallet

Storage

Storage in the packing of origin closed, between +4°C and +25°C.
Deadline of optimal use : 2 years from the date of delivery..

30/10/2009
S.A. REALCO N.V.

Parc scientifique • Wetenschappelijk park • Avenue Albert Einsteinlaan, 15 • B-1348 Louvain-la-Neuve (Belgium)

Tel. +32 (0)10/45.30.00 • Fax +32 (0)10/45.63.63 • info@realco.be • www.realco.be

TVA/BTW-BE-0444.458.750•RPM/RPR Nivelles•ING-350-01322306-20